

SPECIFICATIONS

General information

- Panel weight : 9.20 lbs./ft² bare.
- 1.04" thick calcium sulphate core
- 1.13" inches deep with no covering.
- Protected from corrosion using a hot dipped galvanized top sheet and bottom pan.

UNDERSTRUCTURE OPTIONS

- 2' Bolt-on Stringer Cornerlock
- 2' Snop-on Stringer
- 2' X 2' Heavy Duty Bolted Stringer
- 2' X 4' Heavy Duty Bolted Stringer
- 4' X 4' Heavy Duty Bolted Stringer

COVERING OPTIONS


Factory laminated with integral trim tile

- 1/16" HPL _____ Color _____
- 1/8" HPL _____ Color _____


For additional laminate options contact Sales

Bare Panel Options

- Bare cornerlock to accept carpet tile application

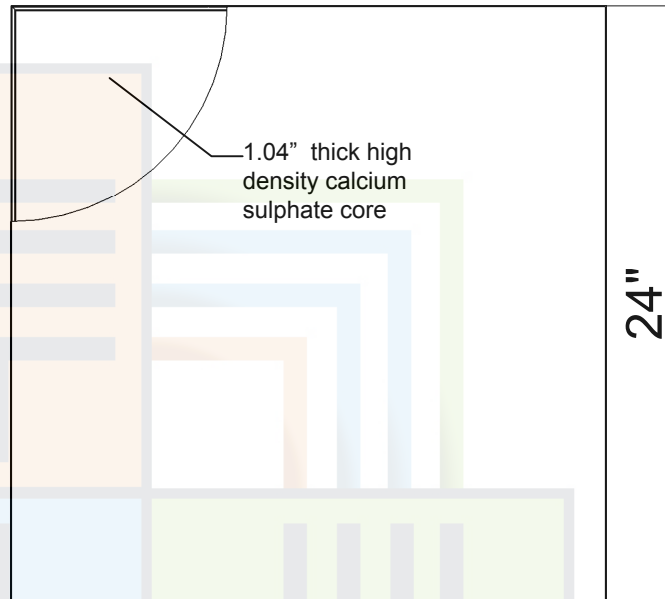


TOP VIEW

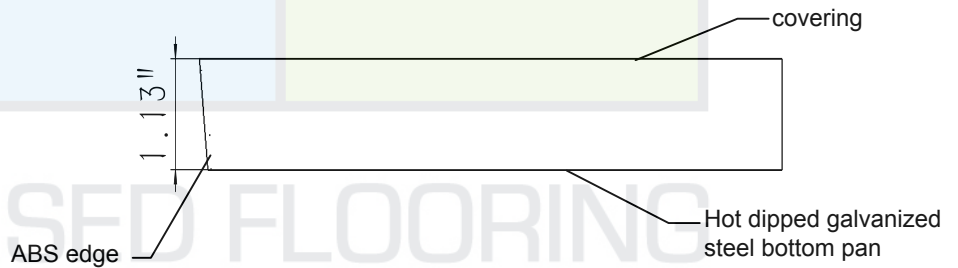

SIDE VIEW

System Performance Criteria

System Type		SYSTEM WEIGHT	STATIC LOADS		ROLLING LOADS		IMPACT LOADS
Panel	Understructure		Design Loads	Safety Factor (min. 2.0)	10 Passes	10,000 Passes	
	Snop-on Stringer	9.80 lbs / ft ²	1250 lbs	Pass	1000 lbs	800 lbs	150 lbs
	Bolt-on Stringer						

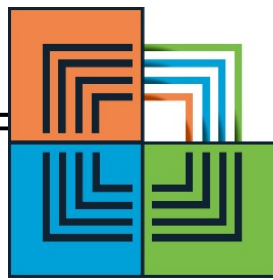

(800)-922-8661

Raisedflooringexperts.com

RAISED FLOORING EXPERTS