

SPECIFICATIONS

General information



- Panel weight : 5.00 lbs./ft² bare.
- 1.04" thick woodcore
- 1.13" inches deep with no covering.
- Protected from corrosion using a hot dipped galvanized top sheet and bottom pan.

UNDERSTRUCTURE OPTIONS

- 2' Bolt-on Stringer Cornerlock
- 2' Snop-on Stringer
- 2' X 2' Heavy Duty Bolted Stringer
- 2' X 4' Heavy Duty Bolted Stringer
- 4' X 4' Heavy Duty Bolted Stringer

COVERING OPTIONS

- Factory laminated tile
- 1/16" HPL _____ Color _____
 - 1/8" HPL _____ Color _____
- For additional laminate options contact Sales
- Bare Panel Options
- Bare cornerlock to accept carpet tile application

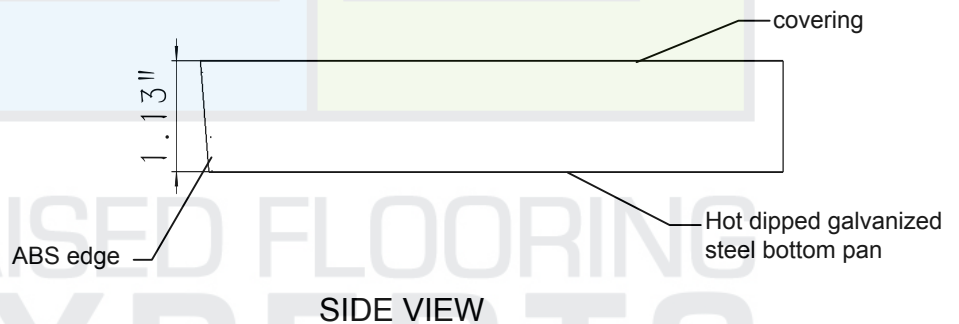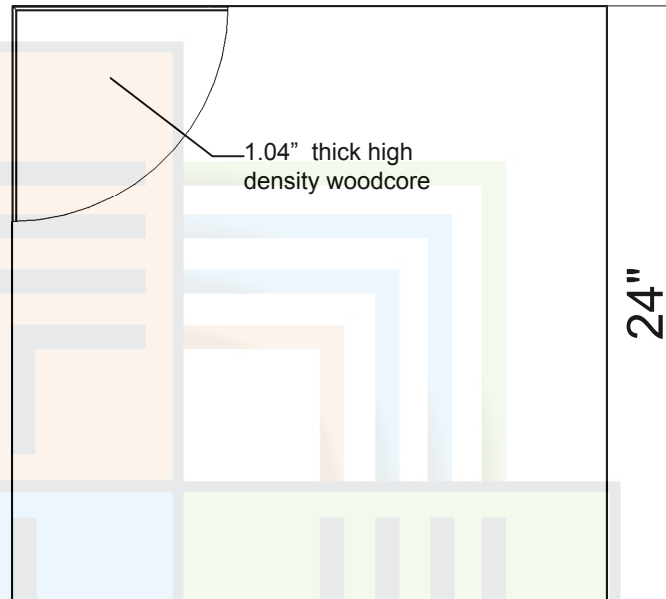

System Performance Criteria						
System Type	SYSTEM WEIGHT	STATIC LOADS		ROLLING LOADS		IMPACT LOADS
		Design Loads	Safety Factor (min. 2.0)	10 Passes	10,000 Passes	
Panel	Understructure					
	Snop-on Stringer	5.60 lbs / ft ²	1250 lbs	Pass	1000 lbs	800 lbs
	Bolt-on Stringer					150 lbs

