



TOP VIEW

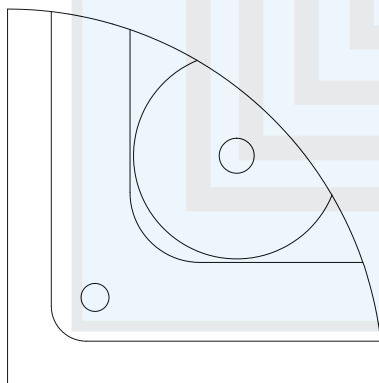

CORNER DETAIL

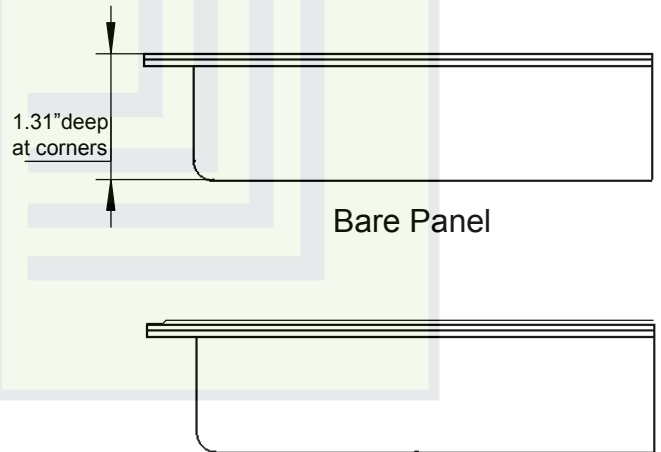

SPECIFICATIONS

General information

- Panel weight: 8.9lbs./ft² bare.
- All steel welded construction filled internally with acementitious core material.
- Protected from corrosion by an epoxy paint finish.
- Class A flame spread rating.
- Non-combustible material.

UNDERSTRUCTURE OPTIONS

- Freestanding
- Corenerlock
- 2' Bolted Stringer
- 4' Bolted Stringer


COVERING OPTIONS

Tile factory laminated with integral trim edge

- 1/8" HPL _____ (Color) _____
- 1/16" HPL _____ (Color) _____
- 1/8" Conductive HPL _____ (Color) _____
- 1/16" Conductive HPL _____ (Color) _____

For additional options contact US Sales

System Performance Criteria (CISCA Testing Method)							
System Type	Understructure	SYSTEM WEIGHT	STATIC LOADS		ROLLING LOADS		IMPACT LOADS
Panel			Concentrated Ultimate Loads	Safety Factor Loads	10Passes	10,000Passes	
SC1250-24"	Cornerlock	9.2 lbs/ft ²	1250 lbs Min. 3125 lbs	Min. 2.5	1000 lbs	800 lbs	150 lbs
	Bolted stringer	9.6 lbs/ft ²	1250 lbs Min. 3125 lbs	Min. 2.5	1000 lbs	800 lbs	150 lbs



(800)-922-8661

Raisedflooringexperts.com
**RAISED FLOORING
 EXPERTS**